


# Transcab cable ducting

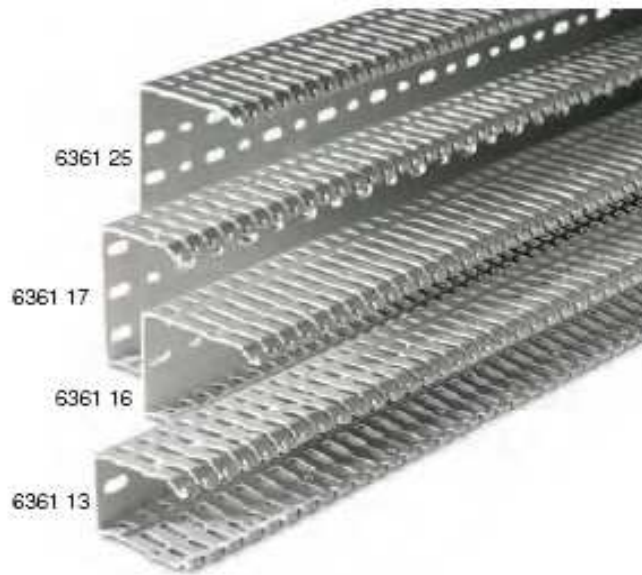

Approvals :

CSA (Canada)

UL (USA)

RAL 7030 Grey PVC /RAL 7035 PC ABS

- 6.5 mm wide fingers with a 6 mm spacing
- Accepts up to 6 mm<sup>2</sup> without breaking side wall finger
- Two pre-scored lines allow removal of fingers
- 2 m length
- Bump on side wall fingers help cabling
- Separation of circuits possible using dividers
- Rounded fingers prevent injury during cabling

Pack	Cat.Nos	Cable ducting (base + cover)
	Grey Range	Width x Height (mm)
32	6360 95	15 x 25
60	<b>6361 00</b>	25 x 25
56	6361 05	40 x 25
40	6360 96	15 x 40
56	<b>6361 01</b>	25 x 40
48	<b>6361 06</b>	40 x 40
32	<b>6361 11</b>	60 x 40
24	6361 15	80 x 40
24	6361 19	100 x 40
56	<b>6361 02</b>	25 x 60
48	<b>6361 07</b>	40 x 60
32	<b>6361 12</b>	60 x 60
24	<b>6361 16</b>	80 x 60
24	6361 20	100 x 60
16	6361 24	120 x 60
40	<b>6361 03</b>	25 x 80
40	<b>6361 08</b>	40 x 80
32	<b>6361 13</b>	60 x 80
24	<b>6361 17</b>	80 x 80
16	<b>6361 21</b>	100 x 80
16	<b>6361 25</b>	120 x 80
24	6361 09	40 x 100
24	6361 14	60 x 100
20	6361 18	80 x 100
16	6361 22	100 x 100
12	6361 23	150 x 100